


M-Grid, Fysiikan Tutkimuslaitos, HIP


Public LAN

Compute Nodes:


Rack #1
 $4U+0U+0U +2U+1U+4U=11U < 42$ iLO 4+2=6 < 26

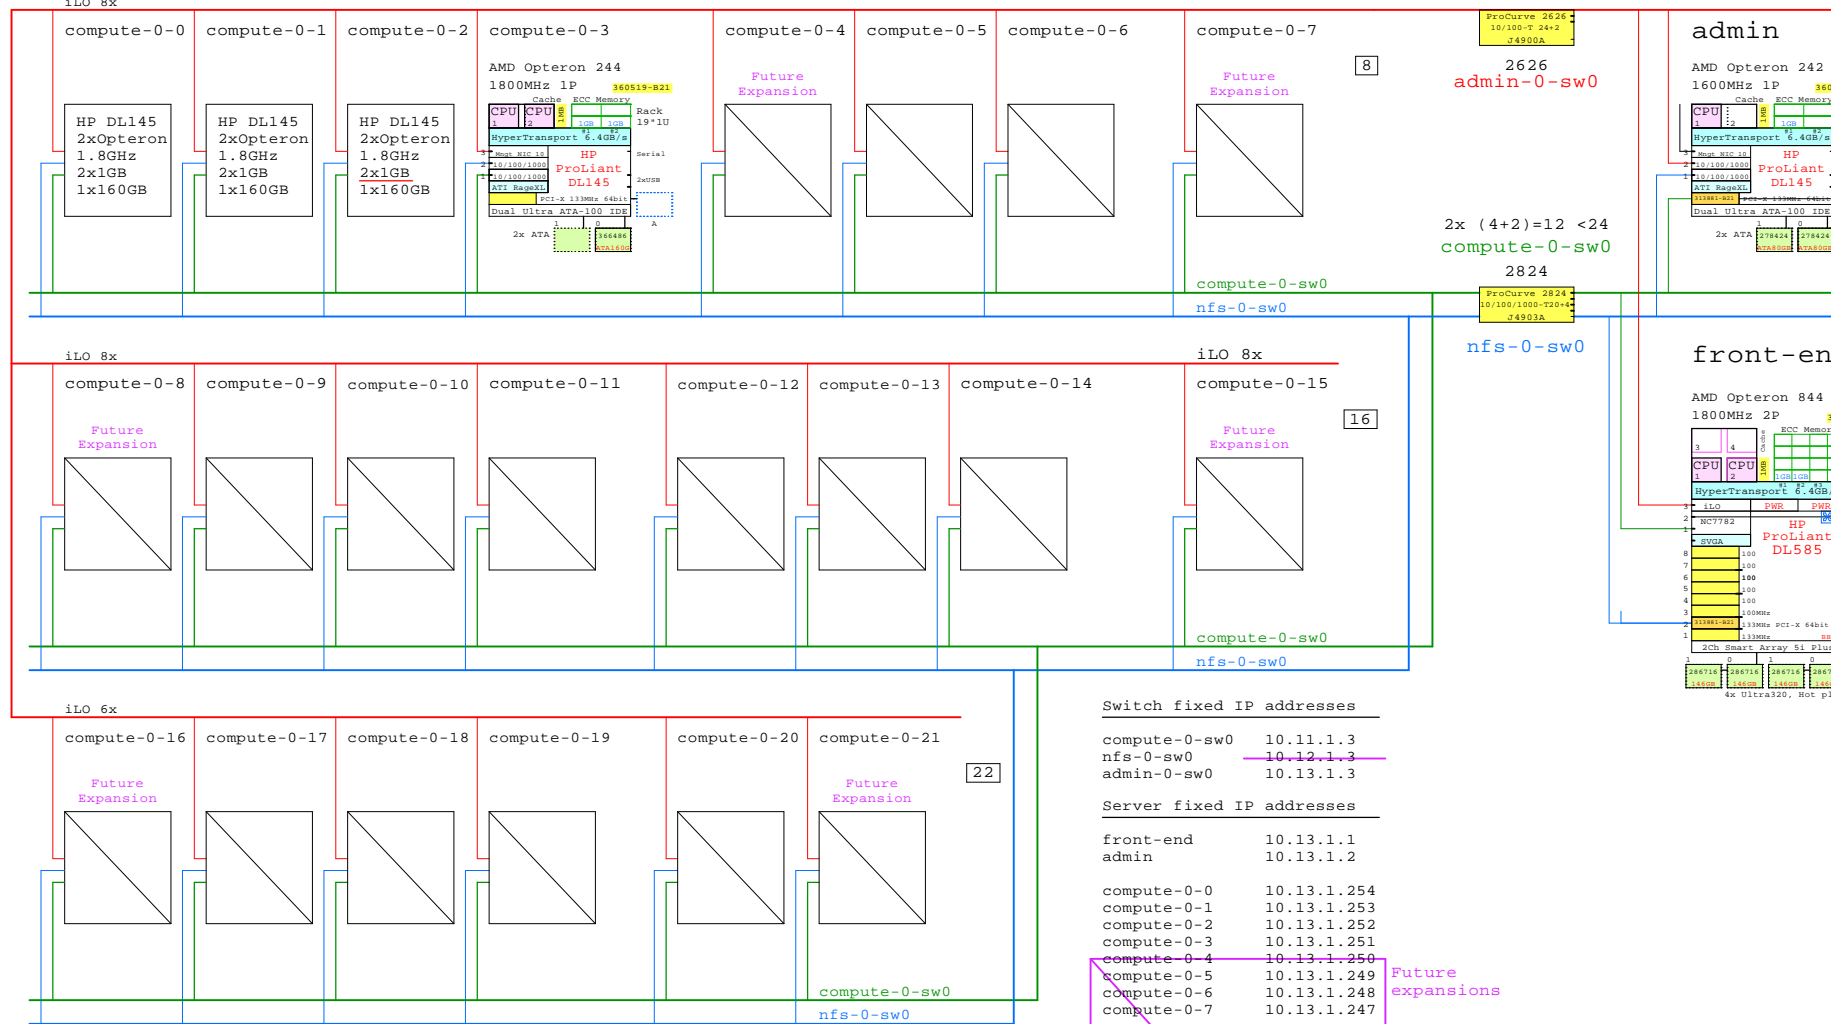

jaspis-a.hip.fi



jaspis.hip.fi



Switch fixed IP addresses

```
compute-0-sw0 10.11.1.3
nfs-0-sw0 10.12.1.3
admin-0-sw0 10.13.1.3
```

Server fixed IP addresses

```
front-end 10.13.1.1
admin 10.13.1.2

compute-0-0 10.13.1.254
compute-0-1 10.13.1.253
compute-0-2 10.13.1.252
compute-0-3 10.13.1.251
compute-0-4 10.13.1.250
compute-0-5 10.13.1.249
compute-0-6 10.13.1.248
compute-0-7 10.13.1.247

compute-0-8 10.13.1.246
compute-0-9 10.13.1.245
compute-0-10 10.13.1.244
compute-0-11 10.13.1.243
compute-0-12 10.13.1.242
compute-0-13 10.13.1.241
compute-0-14 10.13.1.240
compute-0-15 10.13.1.239

compute-0-16 10.13.1.238
compute-0-17 10.13.1.237
compute-0-18 10.13.1.236
compute-0-19 10.13.1.235
compute-0-20 10.13.1.234
compute-0-21 10.13.1.233
```

Future expansions

Limit:22 nodes,
2824 ports used.

NPACI Rocks Cluster Distribution 3.2.0
 (Linux)
<http://www.rocksclusters.org/Rocks/>

Golden Eggs Visual, Created by: Matti.Patari@Kolumbus.fi ,Helsinki
 Global Golden Eggs Visuals: <http://www.LinuxHPC.org>

HP Service Agreement
 ID: xx

Date:03-Oct-2004
 File: M-Grid-HIP

©2005 Matti Patari, All rights reserved.

GOLDEN EGGS Visuals	19-Feb-2005	M-Grid-HIP
Helsinki		Matti.Patari@Kolumbus.fi

M-Grid-HIP
 Fysiikan Tutkimuslaitos HIP

M-Grid HIP